


Brake Fluid Reservoir**Materials**

Name	Specification
Motorcraft® DOT 4 LV High Performance Motor Vehicle Brake Fluid PM-20	WSS-M6C65-A2

Removal

NOTE: Removal steps in this procedure may contain installation details.

1. Remove the brake master cylinder.
Refer to: [Brake Master Cylinder](#) (206-06 Hydraulic Brake Actuation, Removal and Installation).
2. Remove the pin and the brake fluid reservoir. Discard the pin.

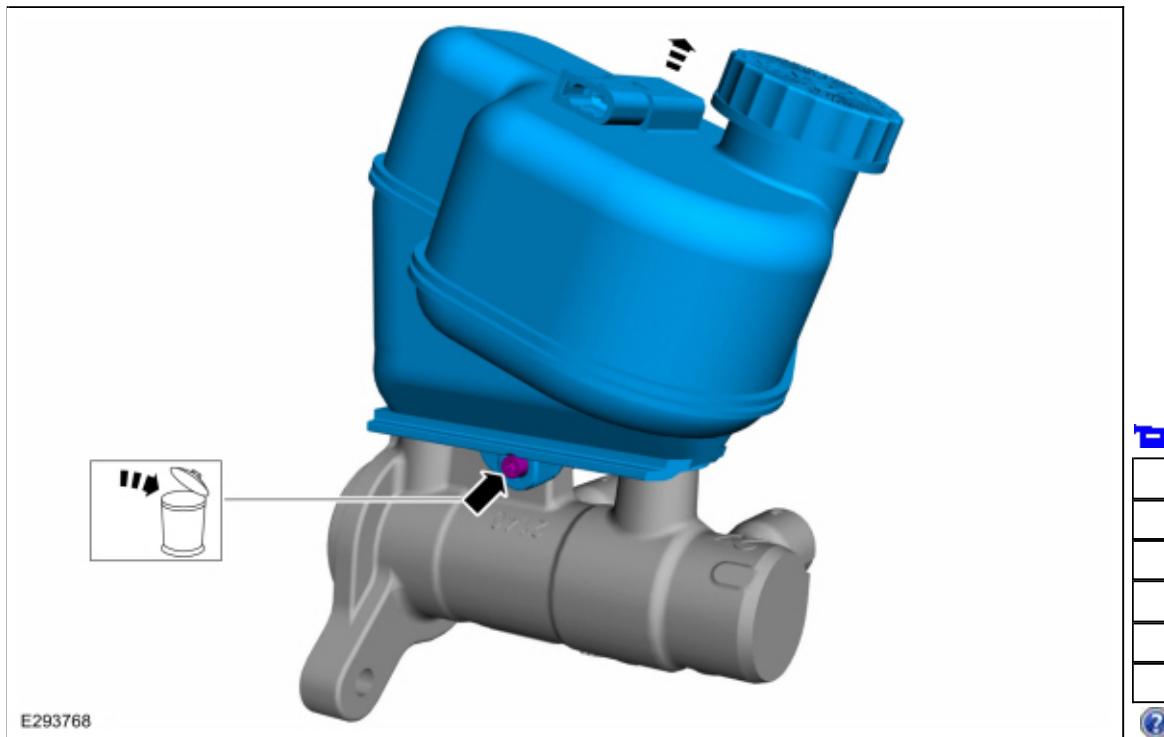


3. **NOTICE:** Only use the specified material to lubricate the seals.

NOTE: Make sure a new component is installed.

Remove and discard the brake fluid reservoir seals.

Material: Motorcraft® DOT 4 LV High Performance Motor Vehicle Brake Fluid / PM-20 (WSS-M6C65-A2)

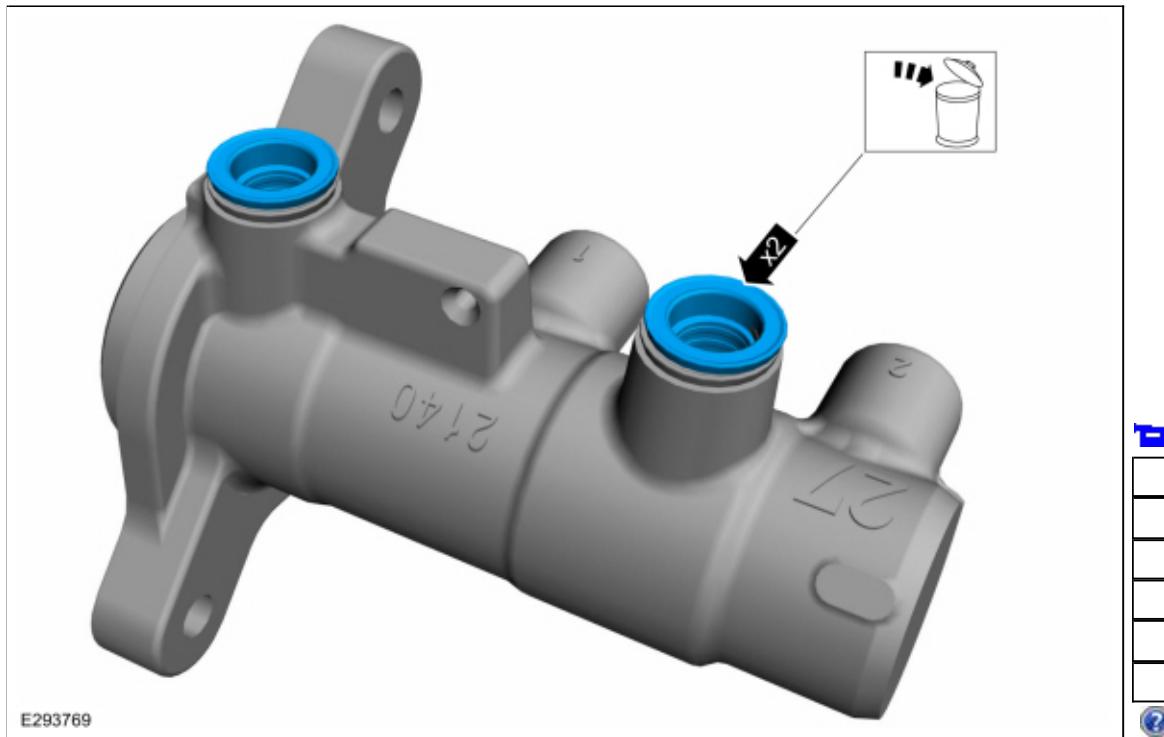

Installation

1. To install, reverse the removal procedure.
2. Bleed the brake system.
Refer to: [Brake System Pressure Bleeding](#) (206-00 Brake System - General Information, General Procedures).

Copyright © 2019 Ford Motor Company

