


Turbocharger Boost Pressure Sensor

Base Part Number: 9F479


Removal

NOTE: Removal steps in this procedure may contain installation details.


1. Remove the bolts and the air cleaner outlet pipe.
Torque: 22 lb.in (2.5 Nm)

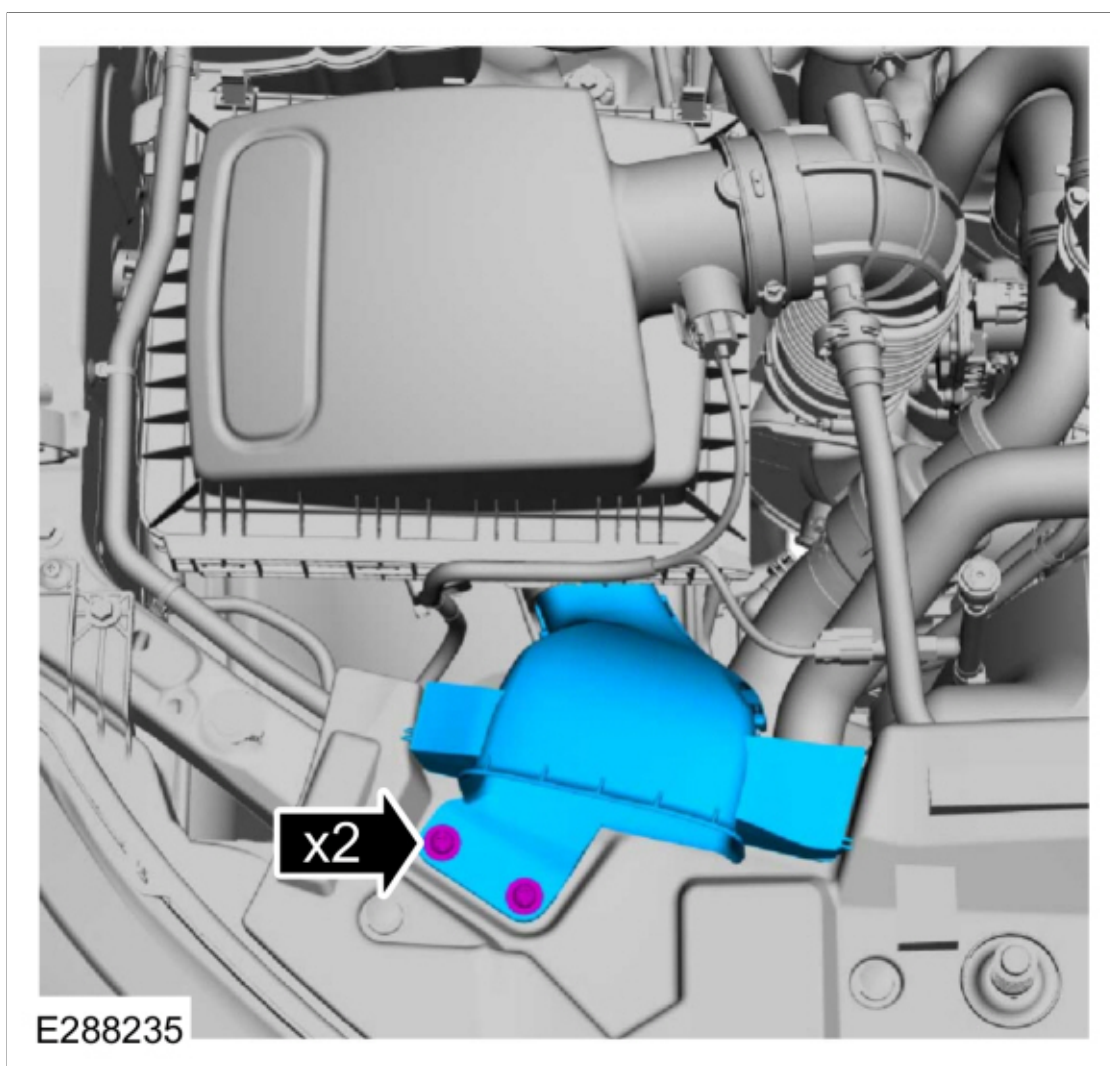

2. Remove the retainers and the upper air deflector.

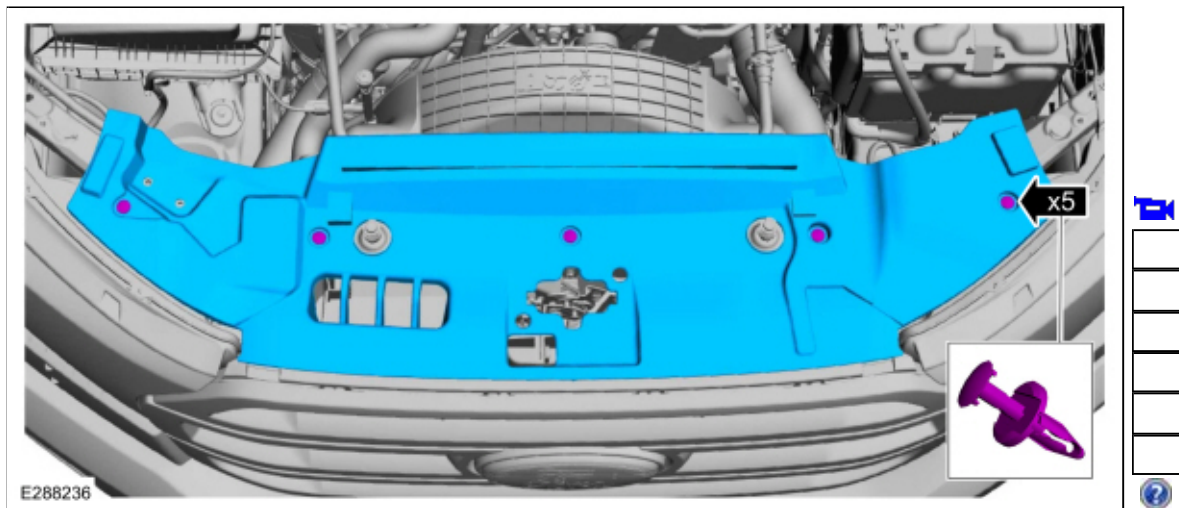

3. Disconnect the electrical connector. Remove the retainer and the turbocharger boost pressure sensor.
Torque: 53 lb.in (6 Nm)

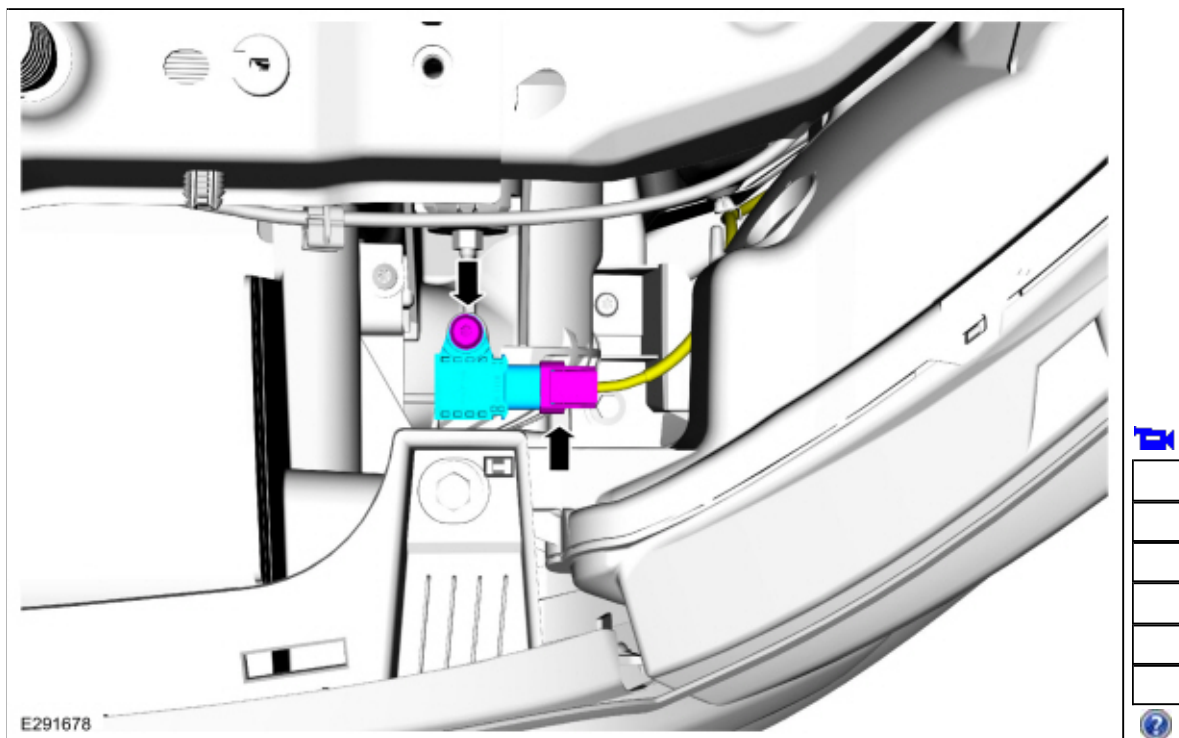

Installation

1. To install, reverse the removal procedure.

