

415-00A Information and Entertainment System - General Information - Vehicles
With: AM/FM

2019 Ranger

Removal and Installation


Procedure revision date:
05/30/2018

Roof Mounted Antenna

Removal


NOTE: Crew cab shown, all others similar.

1. Remove the headliner.
Refer to: Headliner (501-05) .
2. Disconnect the antenna connector.

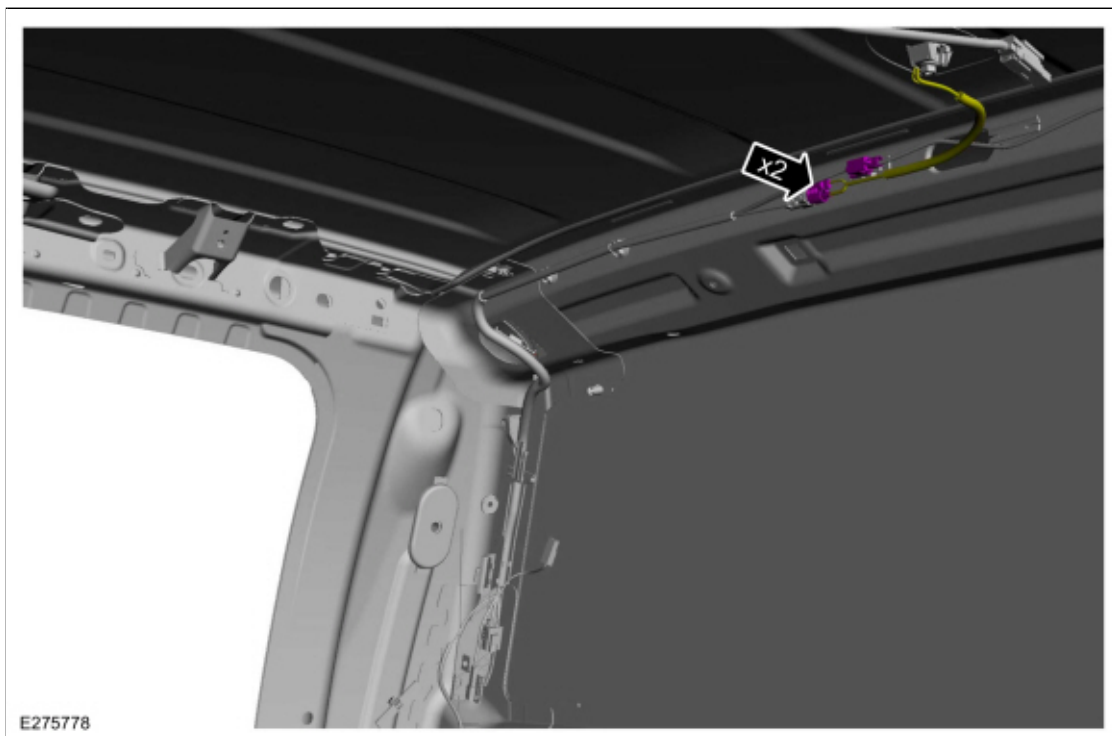

3. Remove the roof antenna.
 1. Remove the nut.
 2. Remove the spring retainer.
 3. Remove the roof antenna.



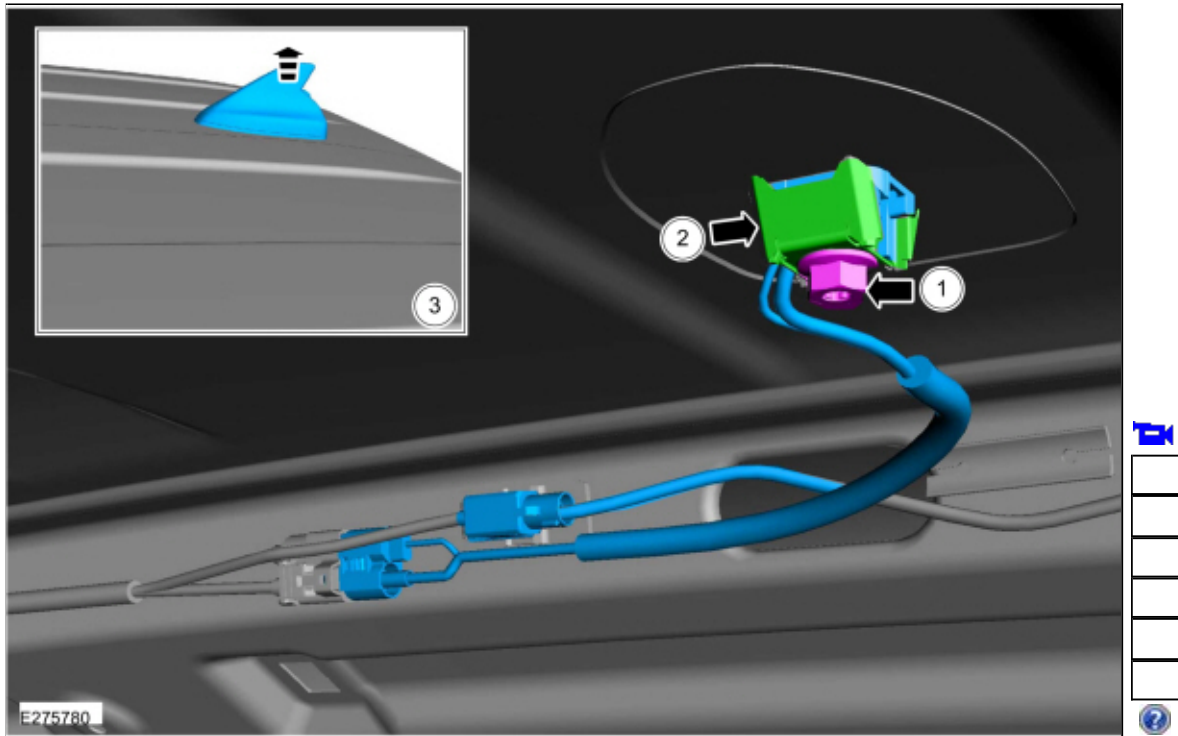

Installation

1. To install, reverse the removal procedure.

Copyright © 2019 Ford Motor Company

