

Audio Digital Signal Processing (DSP) Module


Removal

NOTE: Removal steps in this procedure may contain installation details.


1. **NOTE:** If installing a new module, it is necessary to upload the module configuration information to the scan tool prior to removing the module. This information must be downloaded into the new module after installation.

Using a diagnostic scan tool, begin the PMI process for the DSP following the on-screen instructions.

2. Release the seatback latch and position the rear seatback down.

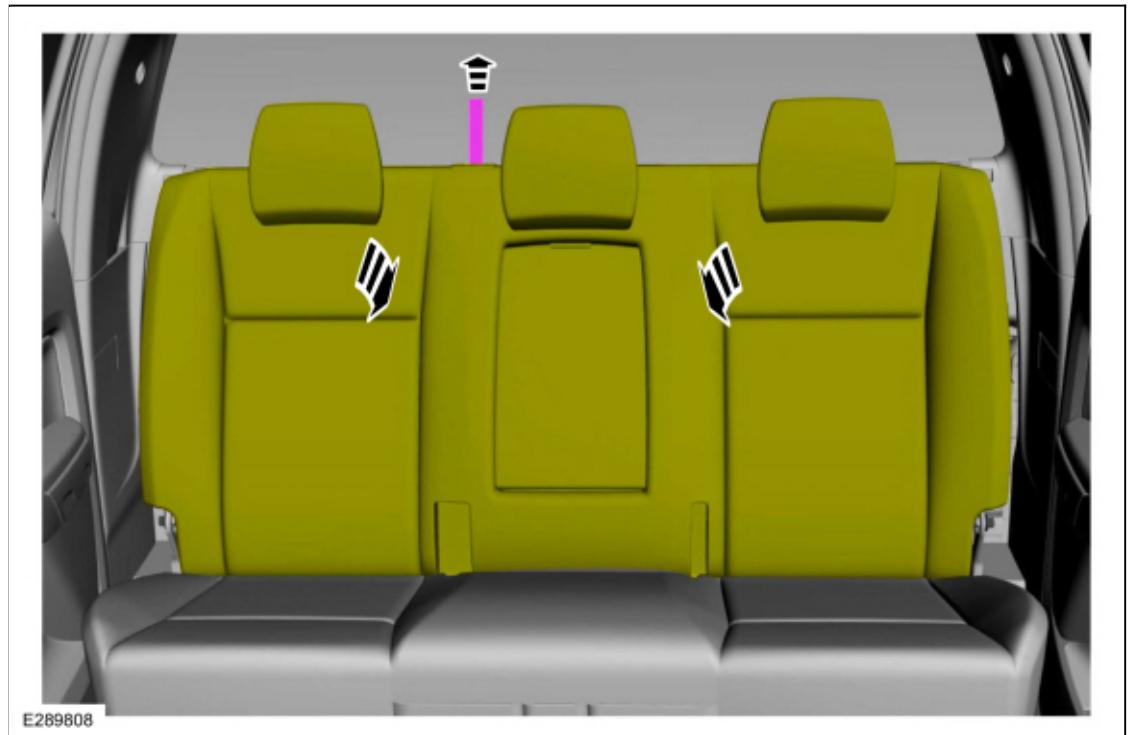

3. Disconnect the electrical connectors, remove the screws and the DSP.
Torque: 62 lb.in (7 Nm)

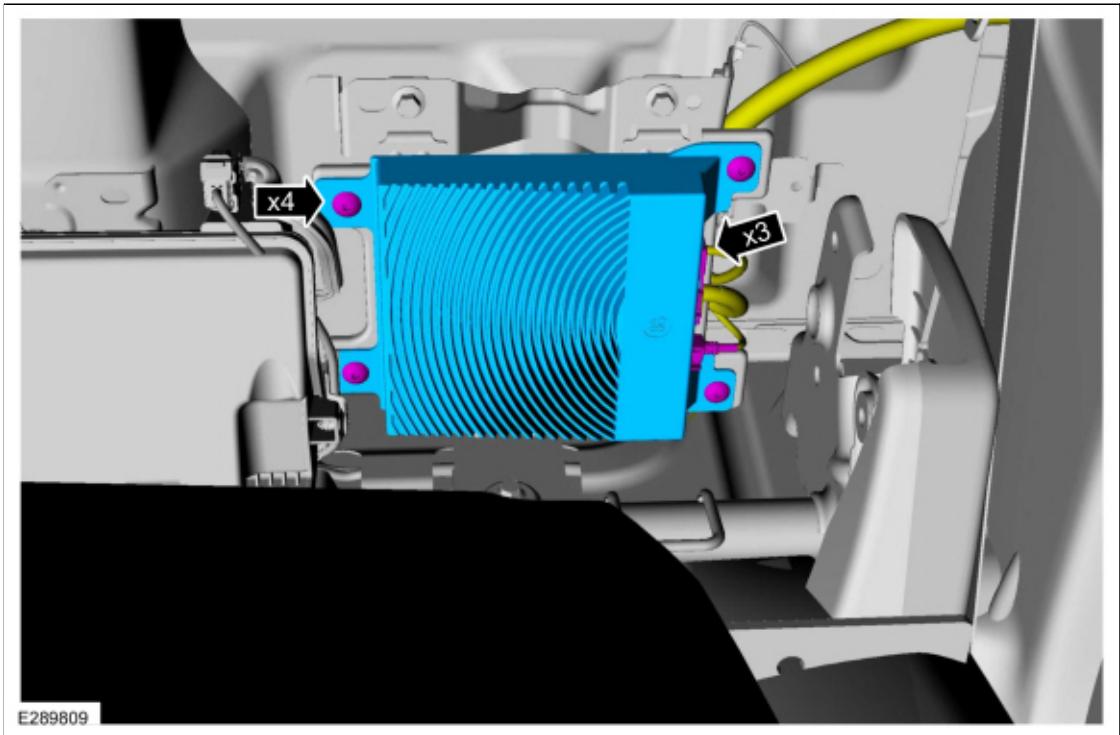

Installation

1. To install, reverse the removal procedure.
2. Using a diagnostic scan tool, complete the PMI process for the DSP following the on-screen instructions.

Copyright © 2019 Ford Motor Company

