

### Rear Door Check Arm - Crew Cab

#### Removal


**NOTE:** Removal steps in this procedure may contain installation details.


**NOTE:** LH side shown, RH side similar.

1. Open the rear door.



2. Remove the check arm bolt.  
*Torque: 18 lb.ft (25 Nm)*



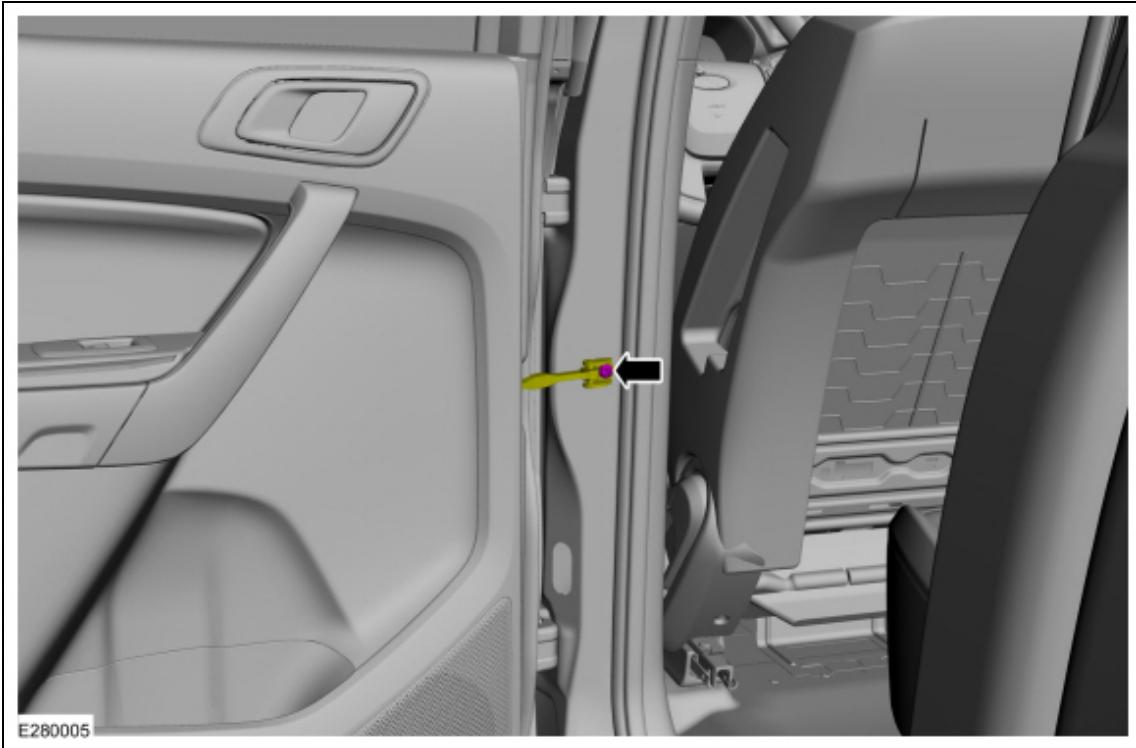


3. Remove the rear door trim panel.  
Refer to: Rear Door Trim Panel - Double Cab (501-05) .

4. **NOTE: Door removed from vehicle for clarity.**


Remove the rear door check arm nuts.

Torque: 97 lb.in (11 Nm)

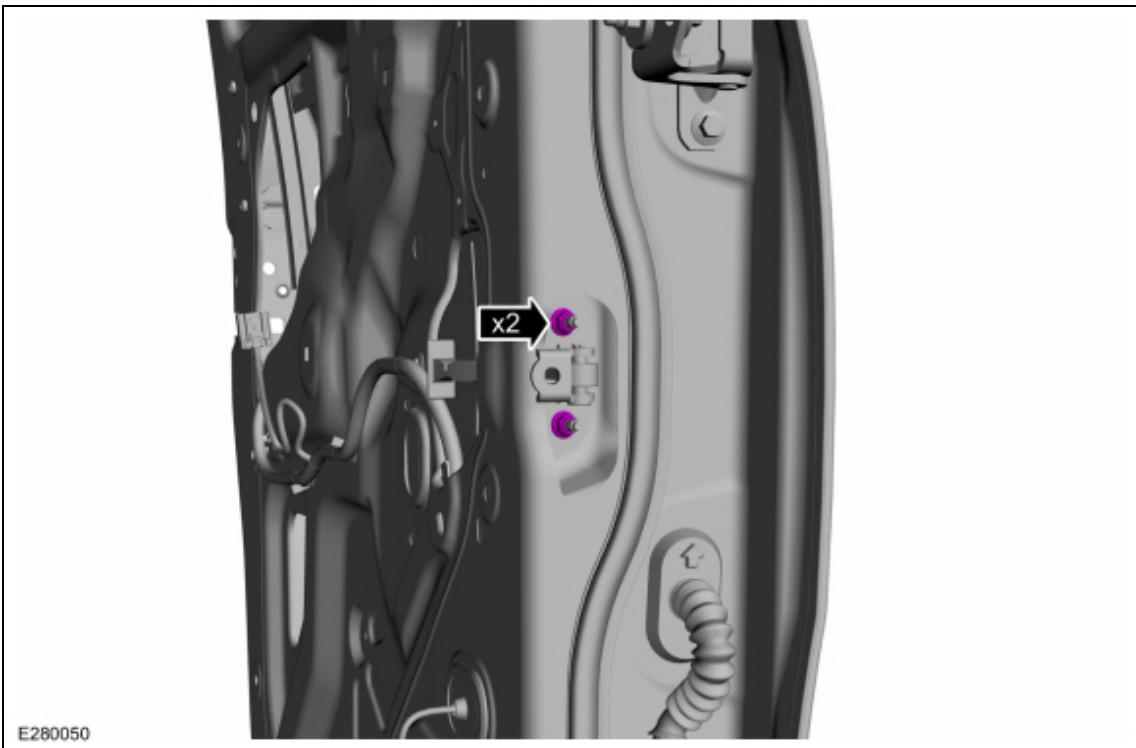

5. **NOTE:** *Door removed from vehicle for clarity.*

Remove the rear door check arm assembly.

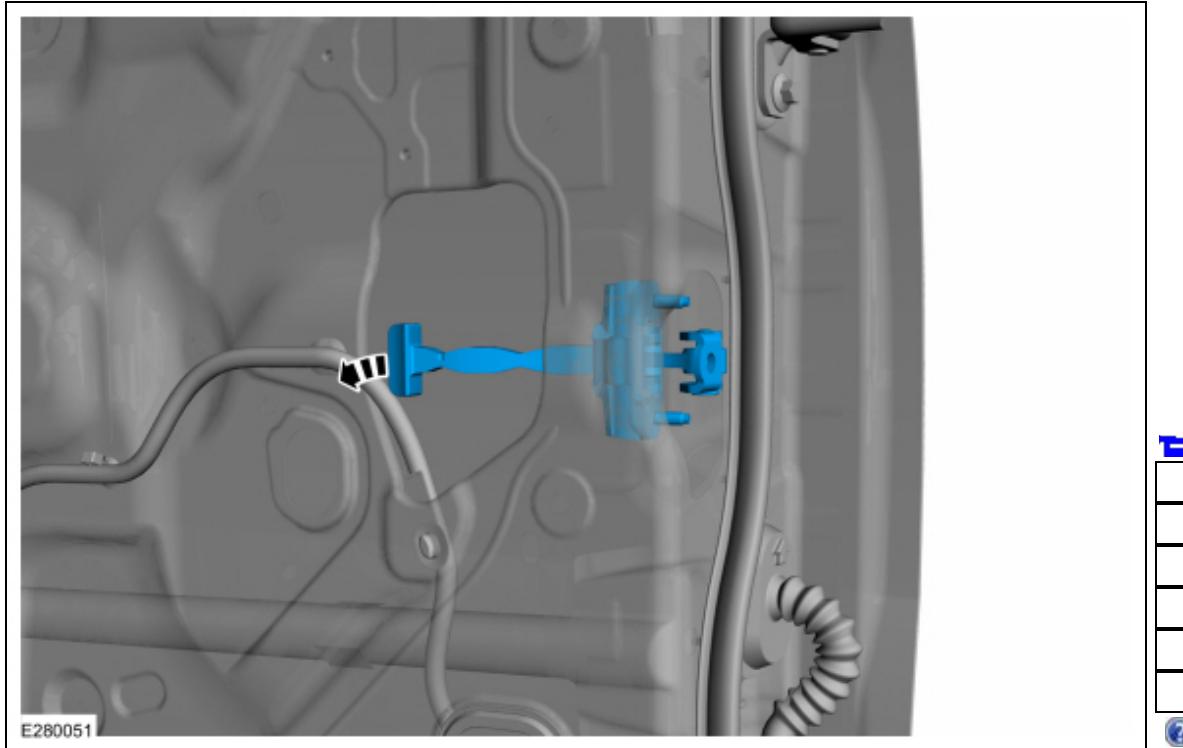

## Installation

1. To install, reverse the removal procedure.

