

A-Pillar Trim Panel

Special Tool(s) / General Equipment

Pick Hook

Removal

NOTE: Removal steps in this procedure may contain installation details.

All

1. **NOTE:** LH shown, RH similar.


Position the front door weatherstrip aside.




Right hand A-pillar trim panel

2. Remove the assist handle bolt covers.
Use the General Equipment: Pick Hook




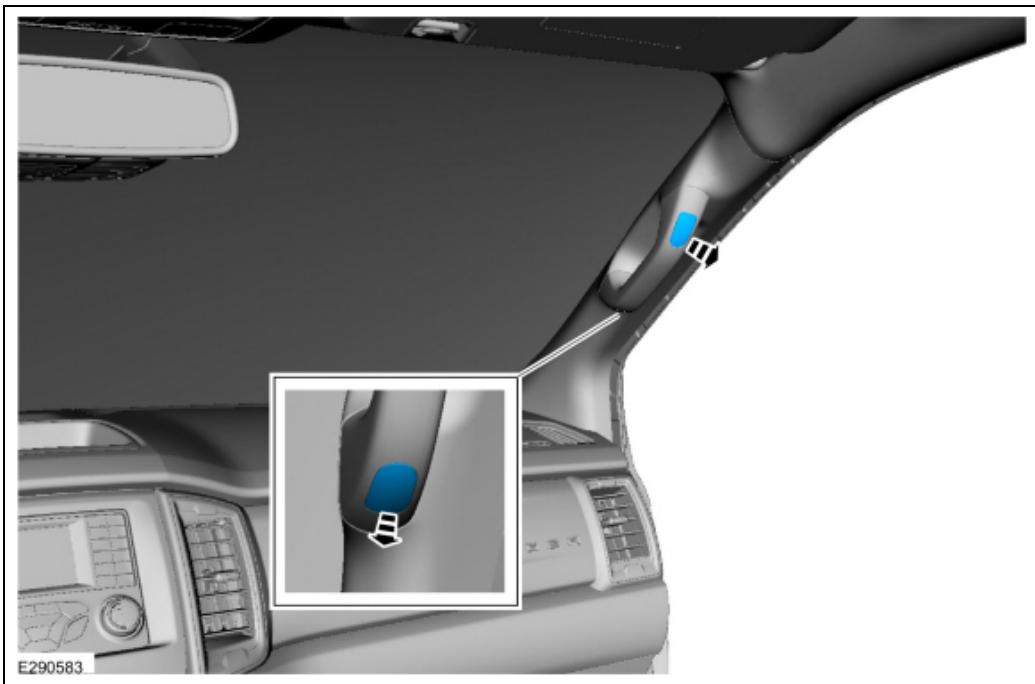

3. Remove the bolts and the assist handle.
Torque: 44 lb.in (5 Nm)

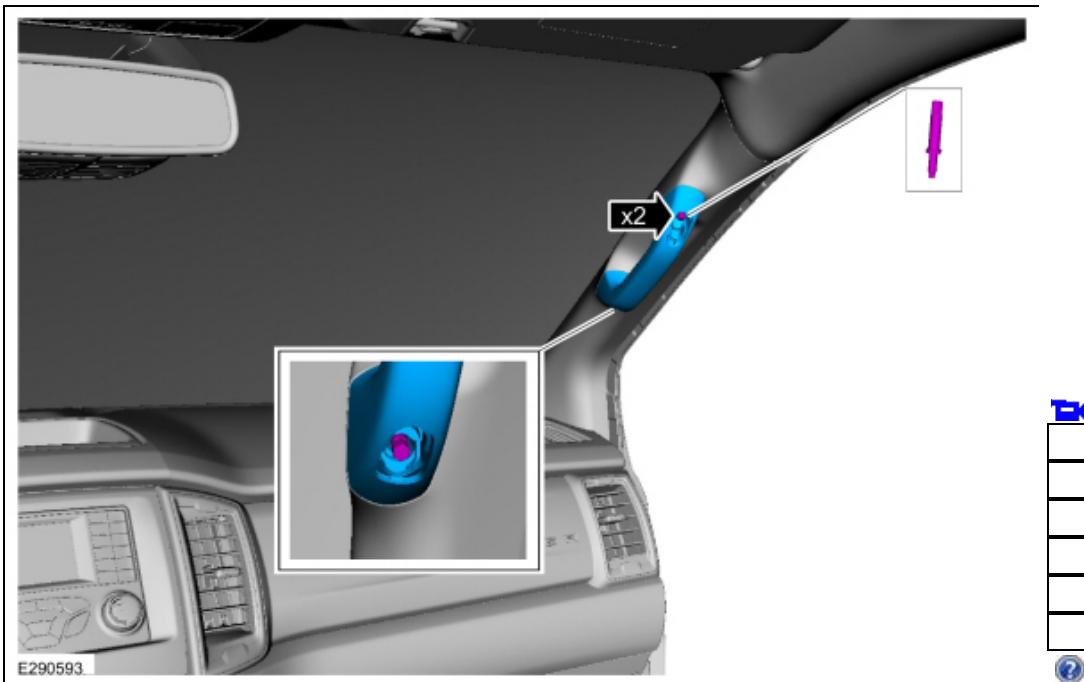


4. Release the A-pillar trim panel upper clip.






Left hand A-pillar trim panel


5. Disconnect the tether clips from the A-pillar trim panel.
 1. Release the A-pillar trim panel clip from the tether clip.
 2. Rotate the tether clip line to align end with opening.
 3. Slide tether clip end out of the A-pillar trim panel.



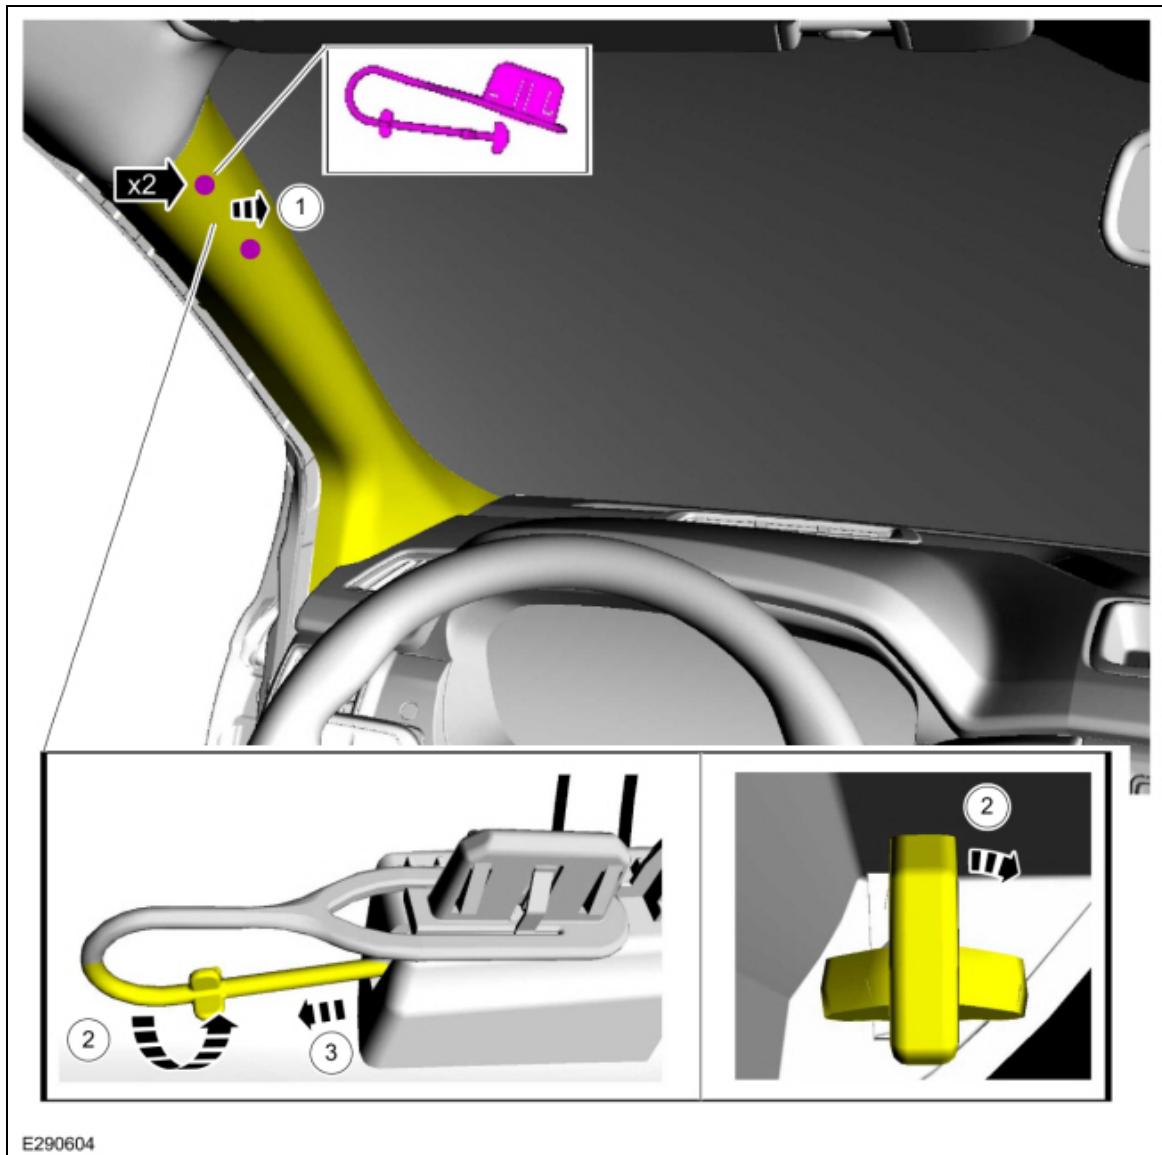

6. Release the A-pillar trim panel lower clip.




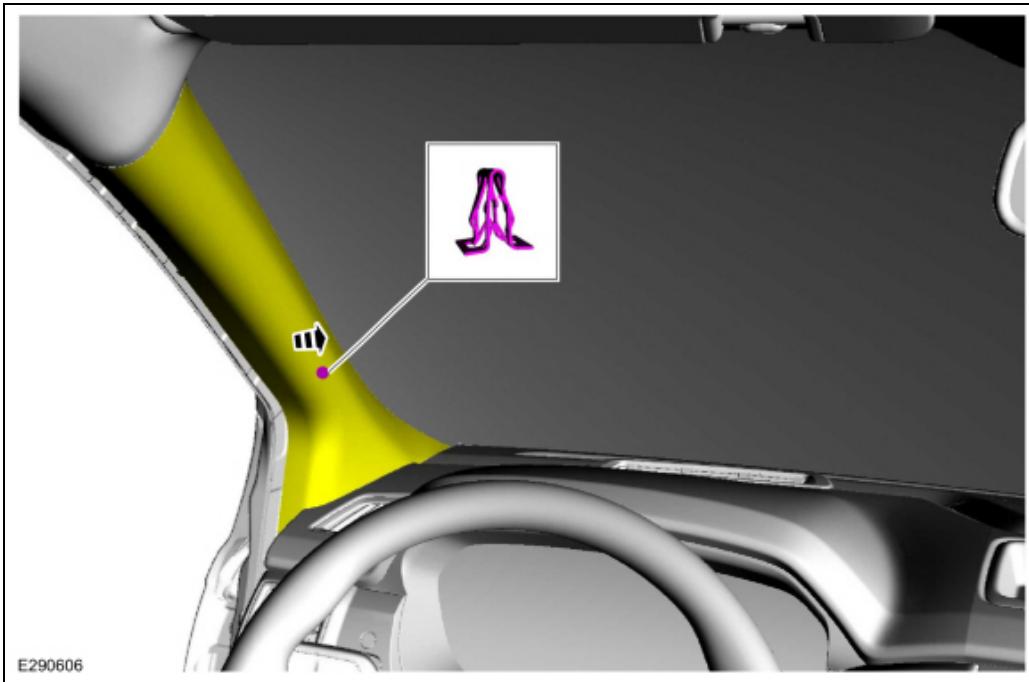

All

7. **NOTE:** LH shown, RH similar.

Lift upward and outward and remove the A-pillar trim panel.

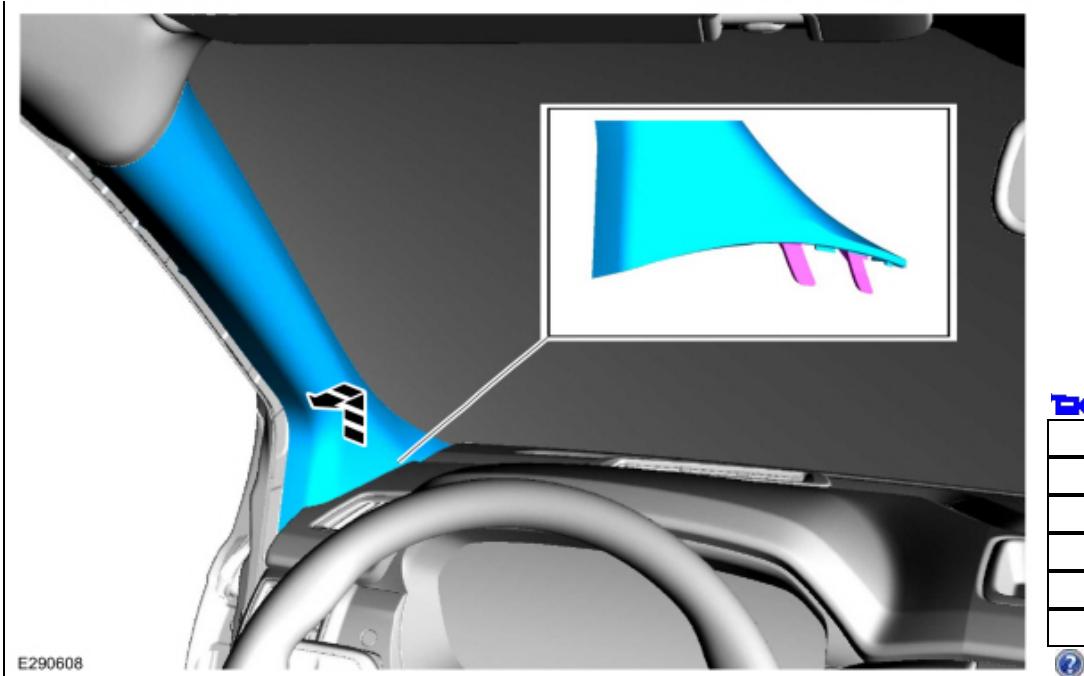

Installation

1. To install, reverse the removal procedure.

