


Radiator Grille

Removal


NOTE: Removal steps in this procedure may contain installation details.

All Vehicles


1. If equipped.
Remove the retainers and the radiator sight shield.

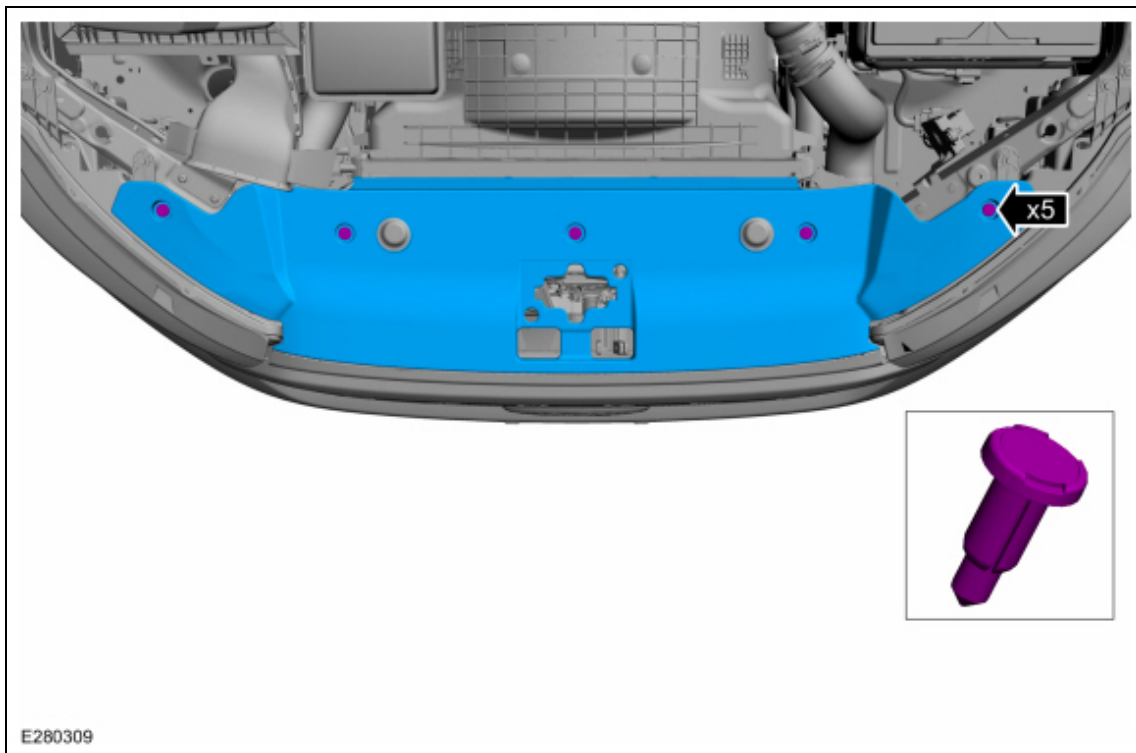

2. If equipped.
 1. Remove the screws and position aside the air intake duct.
 2. Remove the retainers and the radiator sight shield.

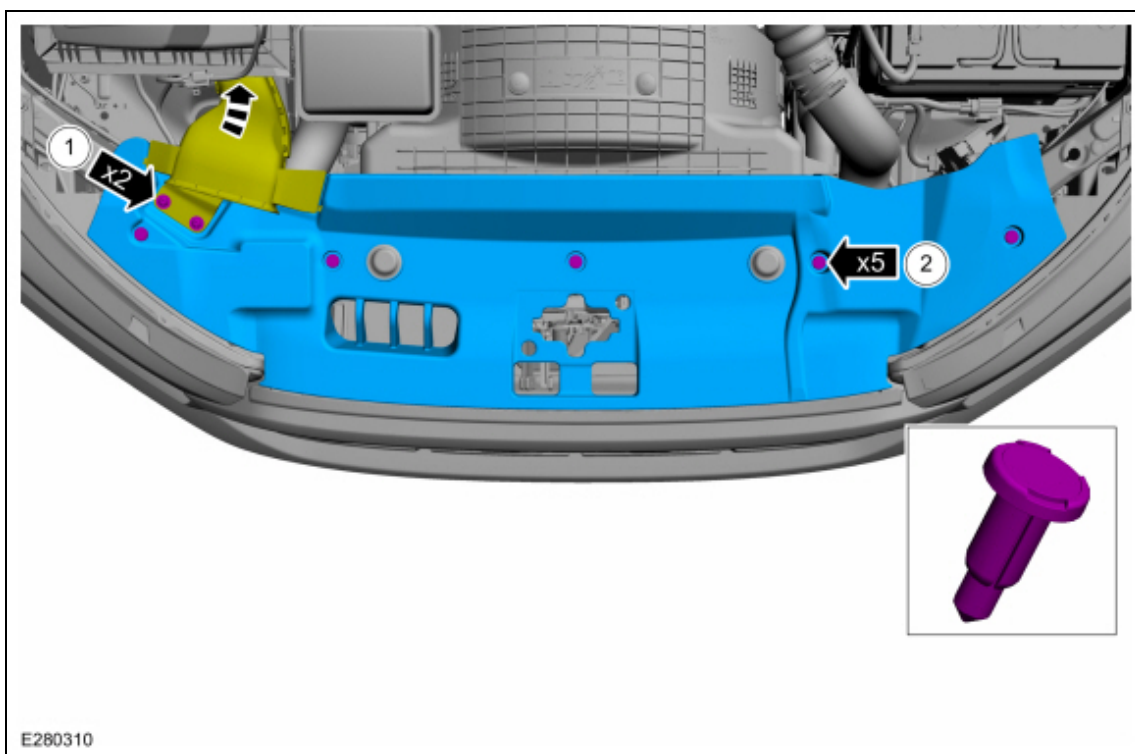


3. Remove the bolts.
Torque: 44 lb.in (5 Nm)

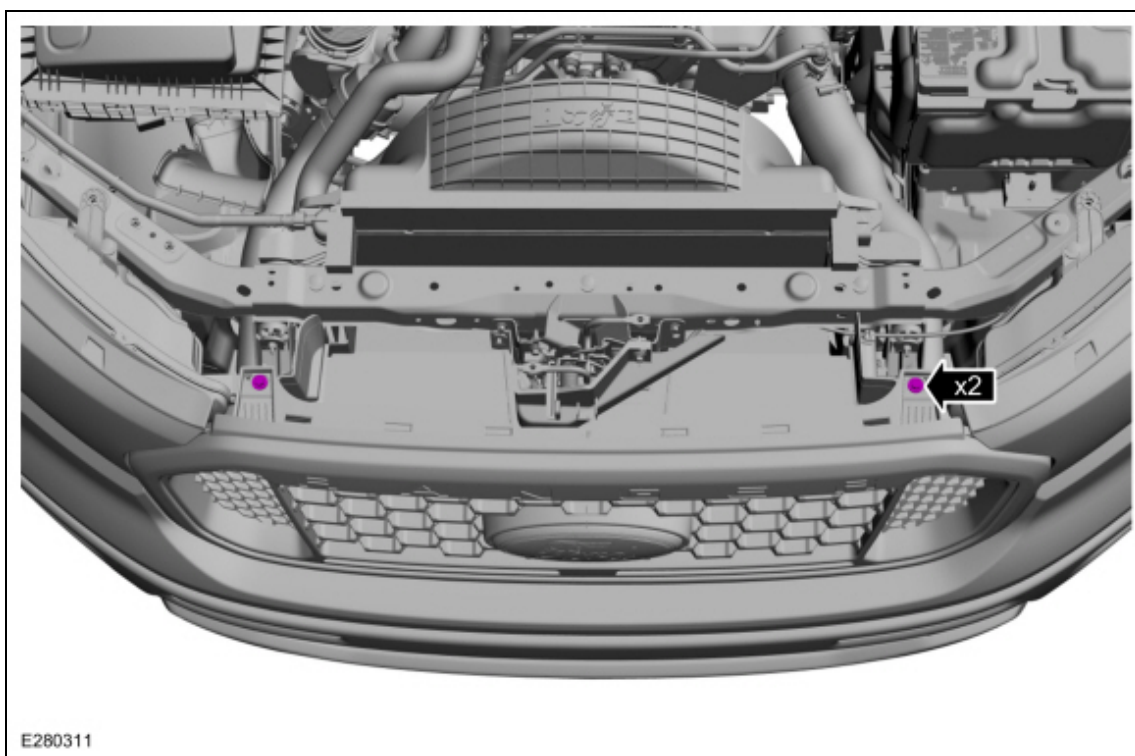

Crew Cab


4. Release the clips and remove the radiator grille.



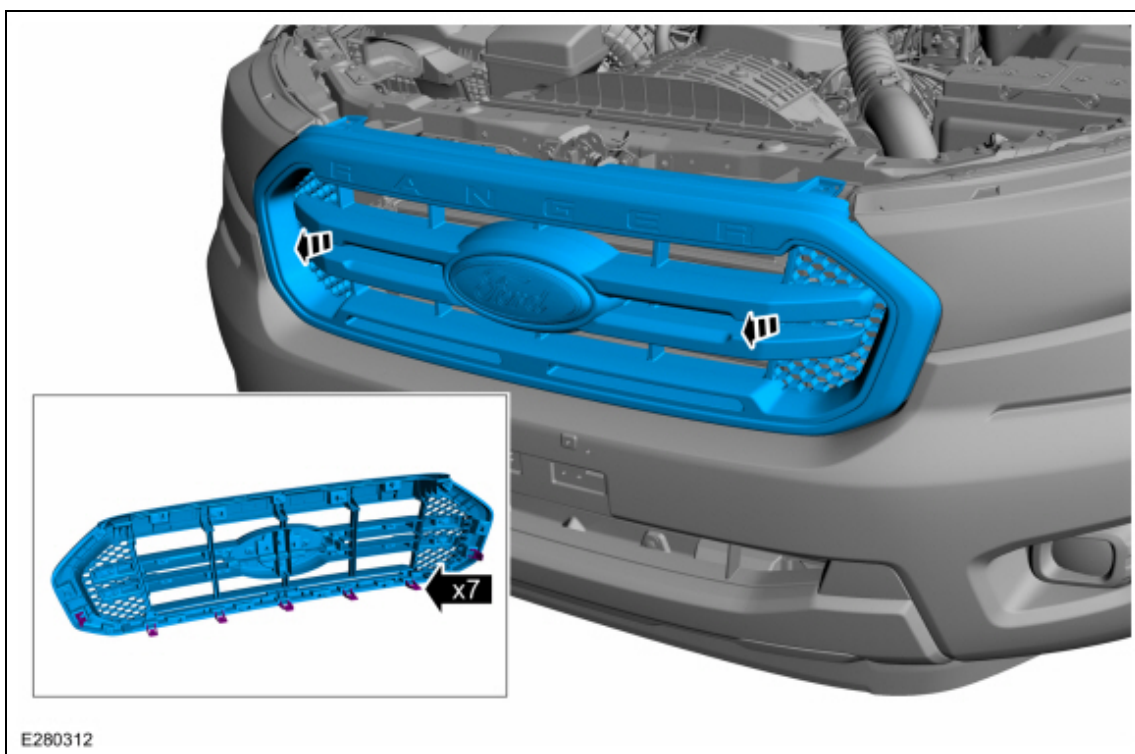

SuperCab

5. Release the clips and remove the radiator grille.

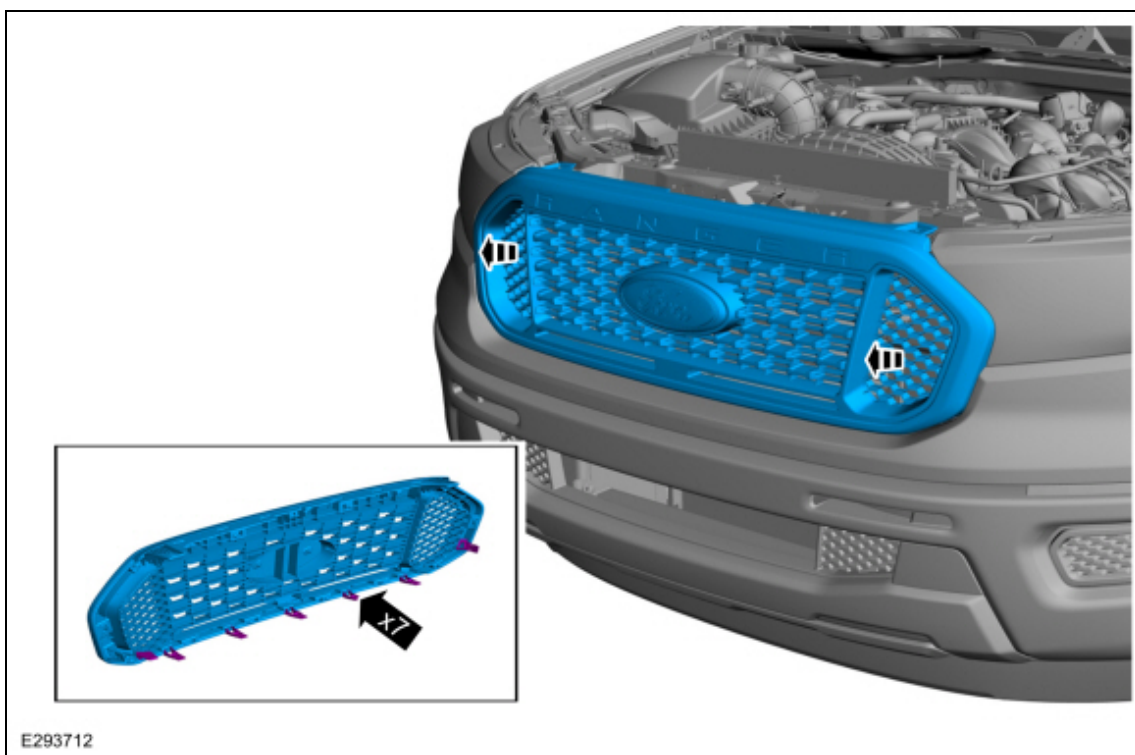

Installation

1. To install, reverse the removal procedure.

