

Exterior Rear Door Handle - Crew Cab

Base Part Number: 22404

Removal

NOTE: LH side shown, RH side similar.


NOTE: Removal steps in this procedure may contain installation details.

All vehicles

1. Remove the exterior rear door handle access plug.




2. Remove the exterior rear door handle trim cover.
 1. Turn the release screw enough to release the exterior rear door handle trim cover.
Torque: 62 lb.in (7 Nm)
 2. Remove the exterior rear door handle trim cover.

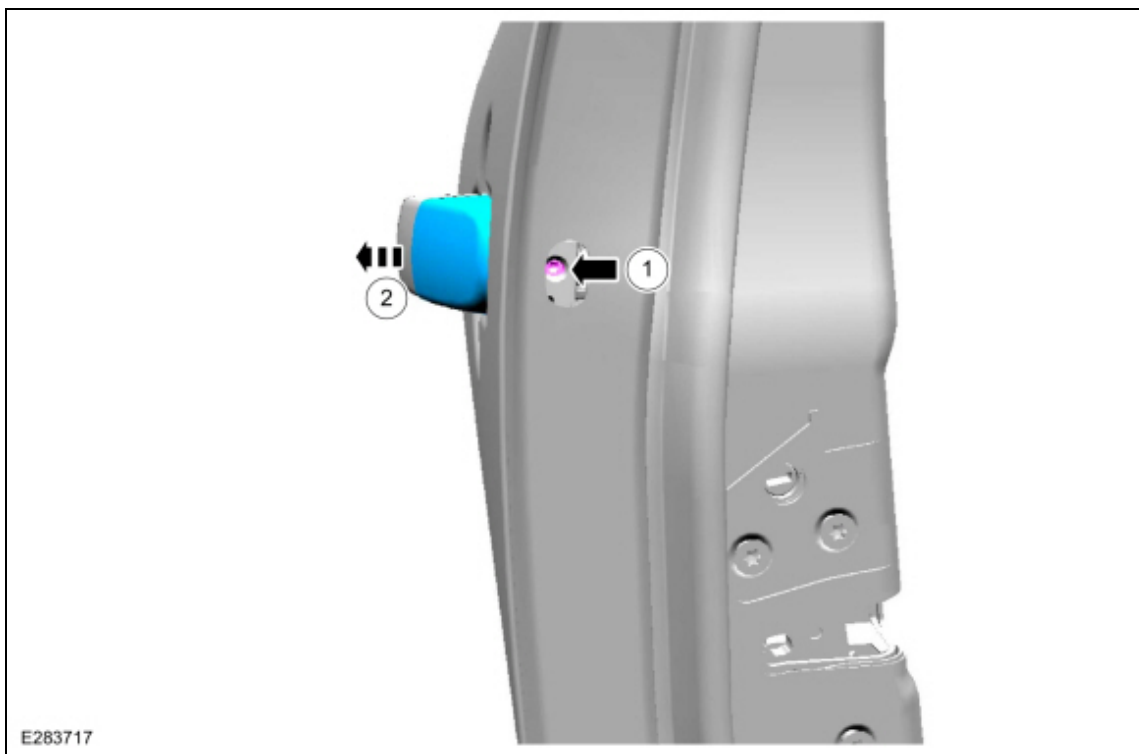

Vehicles without passive entry


3. Remove the rear exterior door handle.

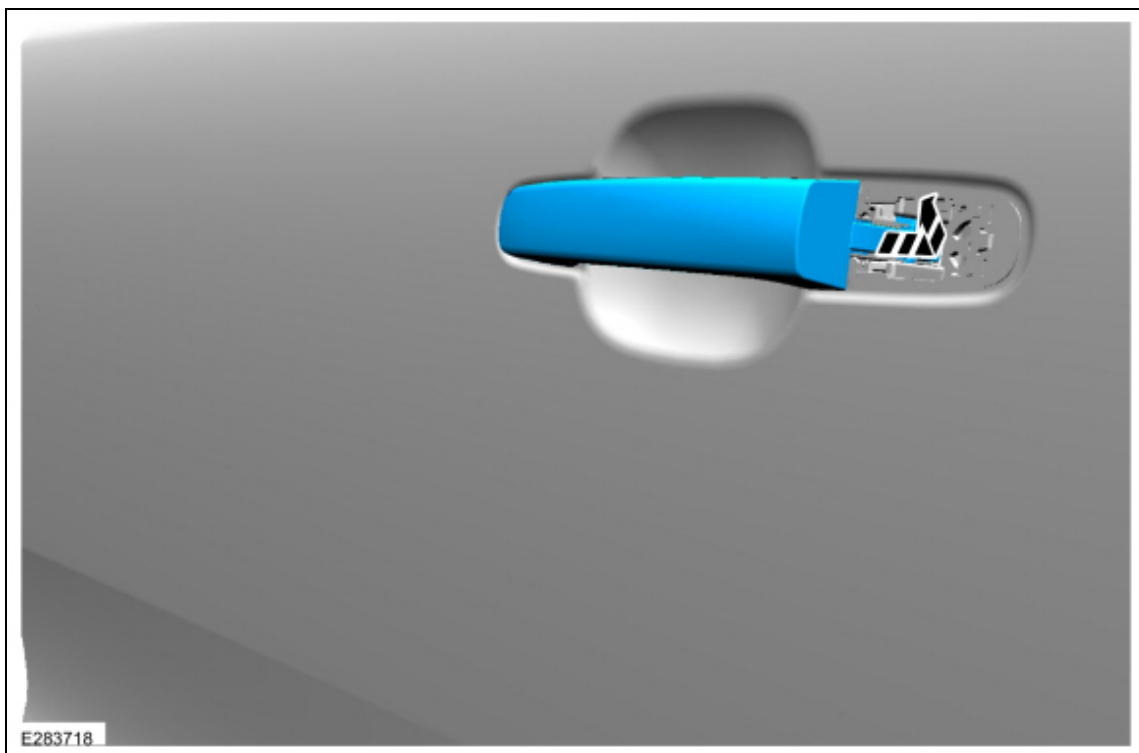

Vehicles with passive entry


4. **NOTICE:** Do not pull the door handle out of the door too far without disconnecting the handle from the connector. Damage to the harness will occur.

Partially remove the exterior rear door handle.

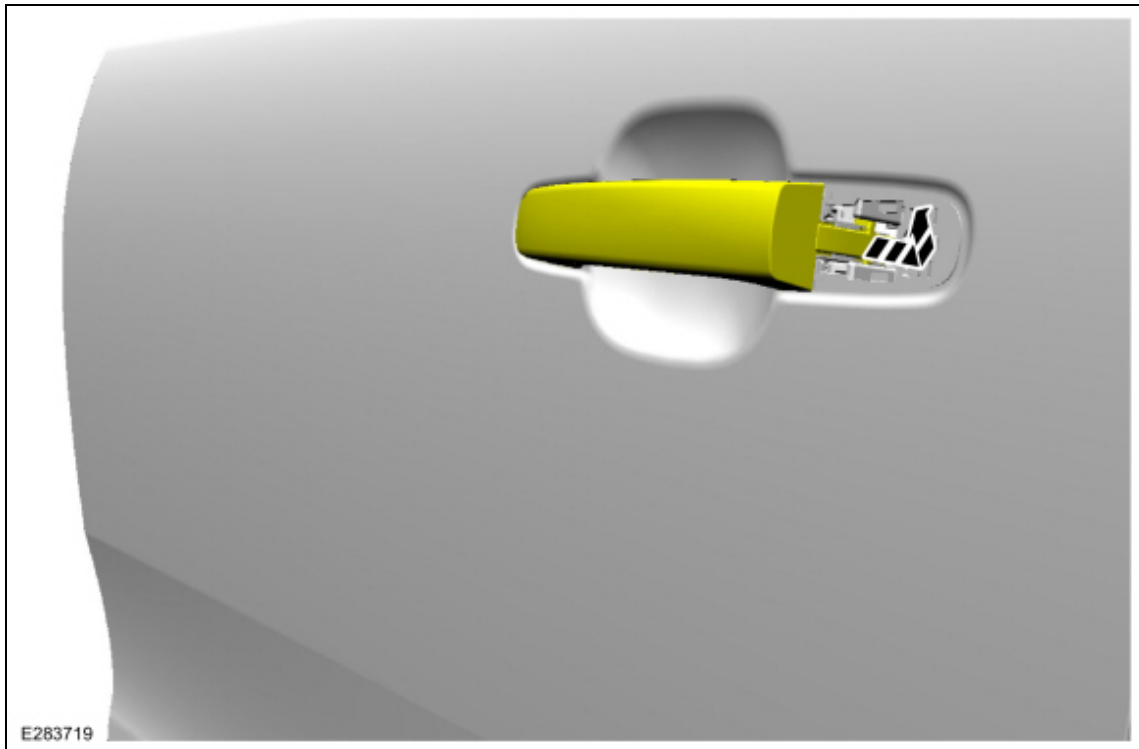


5. **NOTICE:** Do not pull the door handle out of the door too far without disconnecting the handle from the connector. Damage to the harness will occur.

Disconnect the electrical connector and remove the exterior rear door handle.

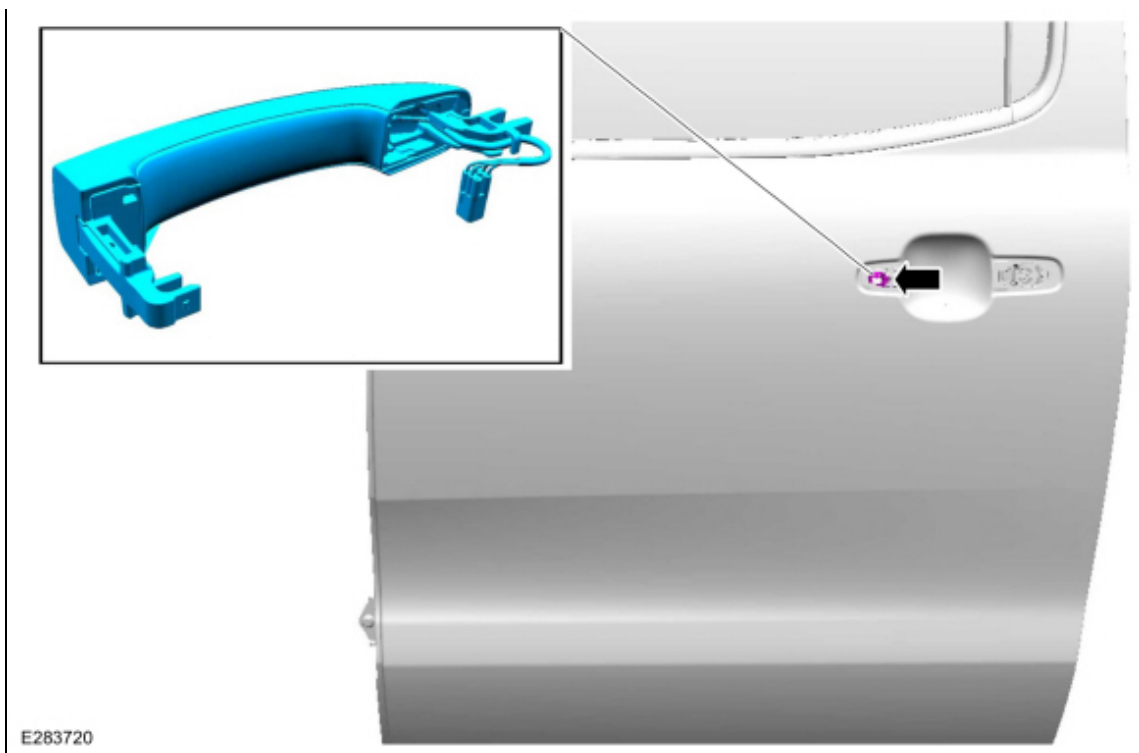

All vehicles

6. Remove the exterior rear door handle gaskets.

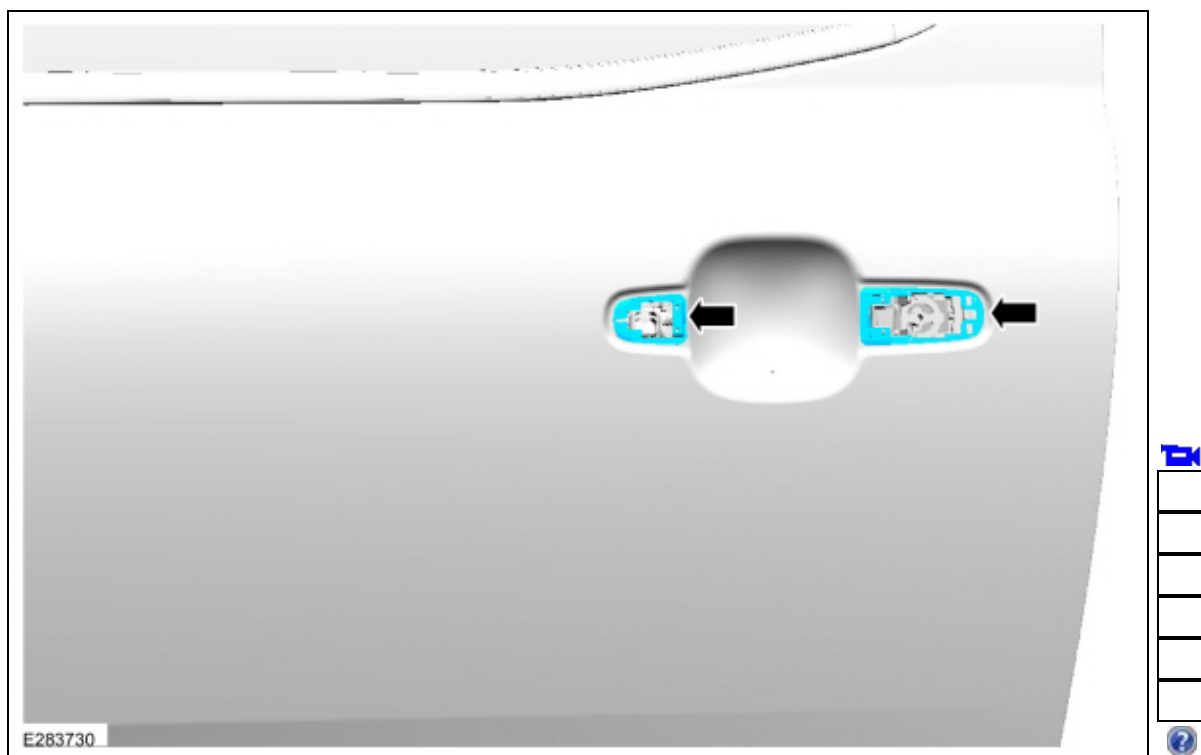

Installation

1. To install, reverse the removal procedure.

