


Rear Door Cable - SuperCab

Removal

NOTE: RH side shown, LH side similar.


Upper door latch cable

1. Remove the rear door upper latch.
Refer to: [Rear Door Upper Latch - SuperCab](#) (501-14 Handles, Locks, Latches and Entry Systems, Removal and Installation).
2. Remove the rear door upper latch cable.
 1. Remove the rear door upper latch cable from the cable mounting bracket.
 2. Remove the rear door upper latch cable eyelet from the interior rear door handle.

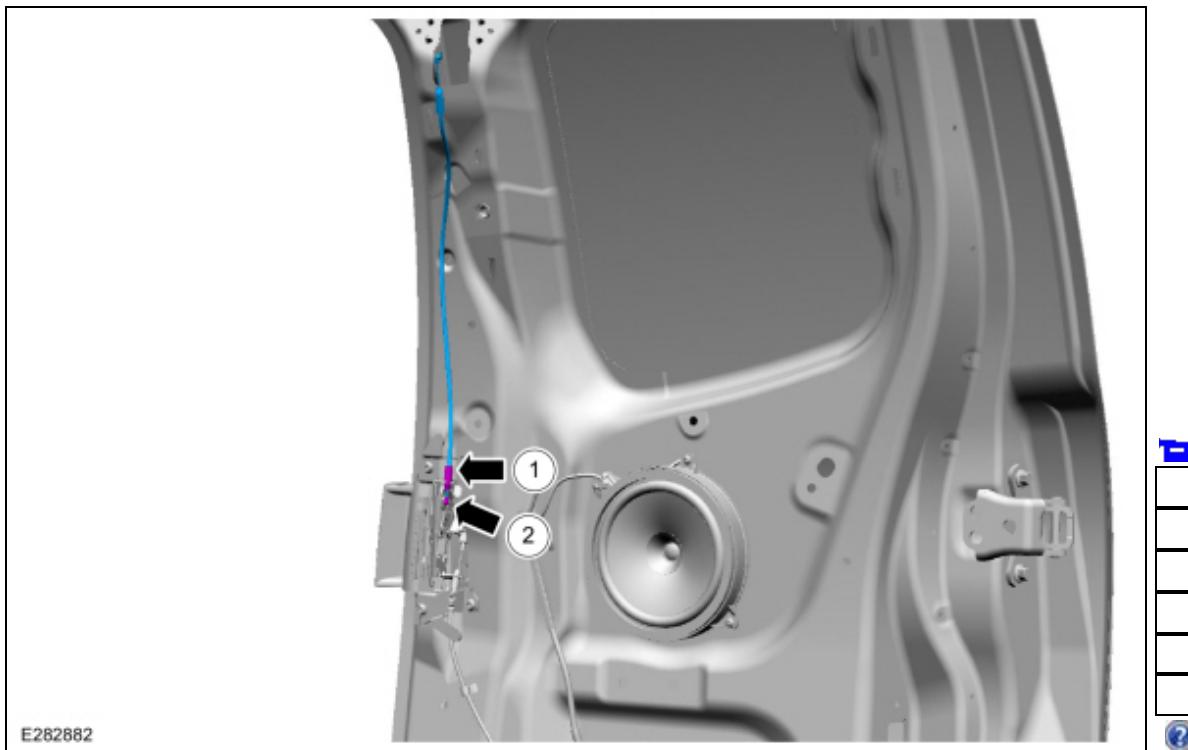

Lower door latch cable

3. Remove the rear door lower latch.
Refer to: [Rear Door Lower Latch - SuperCab](#) (501-14 Handles, Locks, Latches and Entry Systems, Removal and Installation).
4. Remove the rear door lower latch cable.
 1. Detach the rear door lower latch cable routing clips.
 2. Remove the rear door lower latch cable from the cable mounting bracket.
 3. Remove the rear door lower latch cable eyelet from the interior rear door handle.

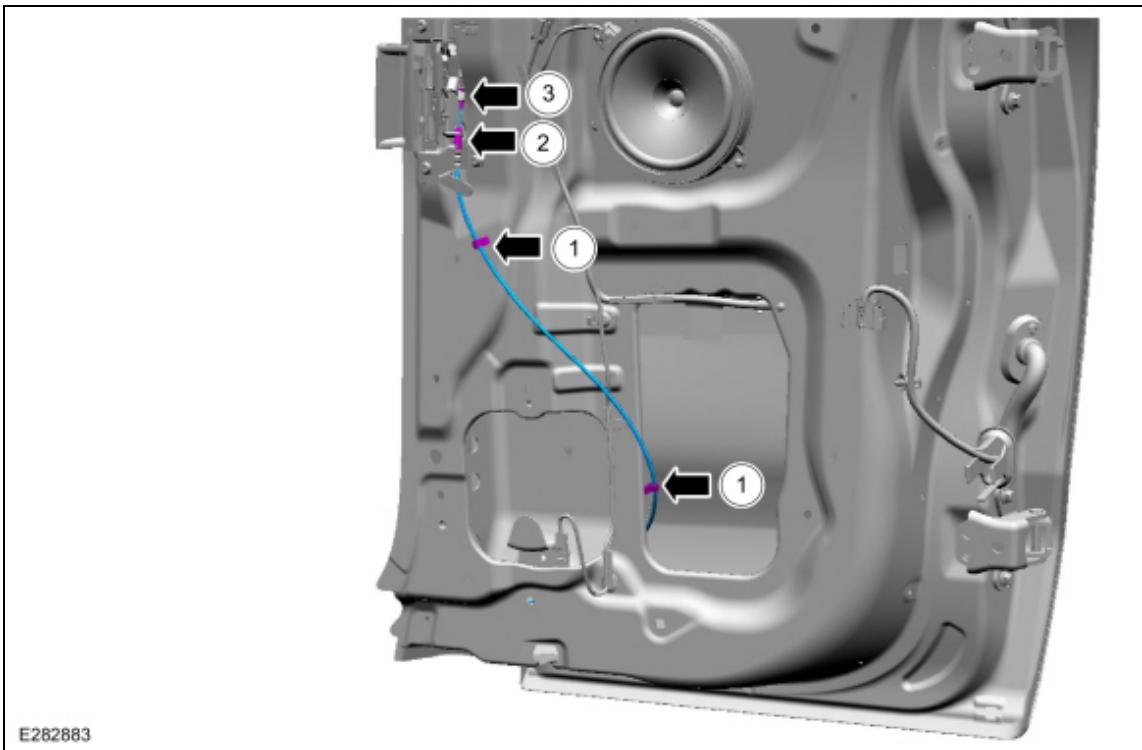

Installation

1. To install, reverse the removal procedure.

