

Rear Door Lower Latch - SuperCab

Removal

NOTE: RH side shown, LH side similar.


NOTE: Removal steps in this procedure may contain installation details.

1. Remove the rear door trim panel.
Refer to: Rear Door Trim Panel - SuperCab (501-05) .
2. Remove the rear door watershield.




3. Remove the rear door lower latch bolts.
Torque: 106 lb.in (12 Nm)



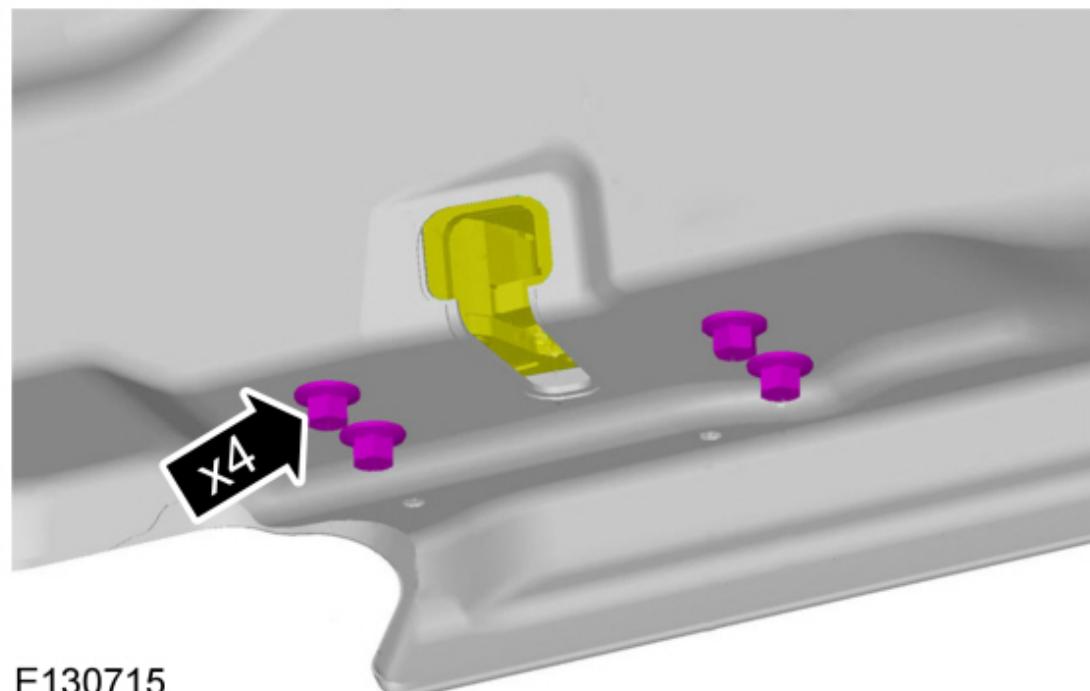

4. Remove the rear door lower latch.

1. Partially remove the rear door lower latch.
2. Detach the cable from the cable mounting bracket.
3. Remove the cable eyelet from the rear door lower latch.

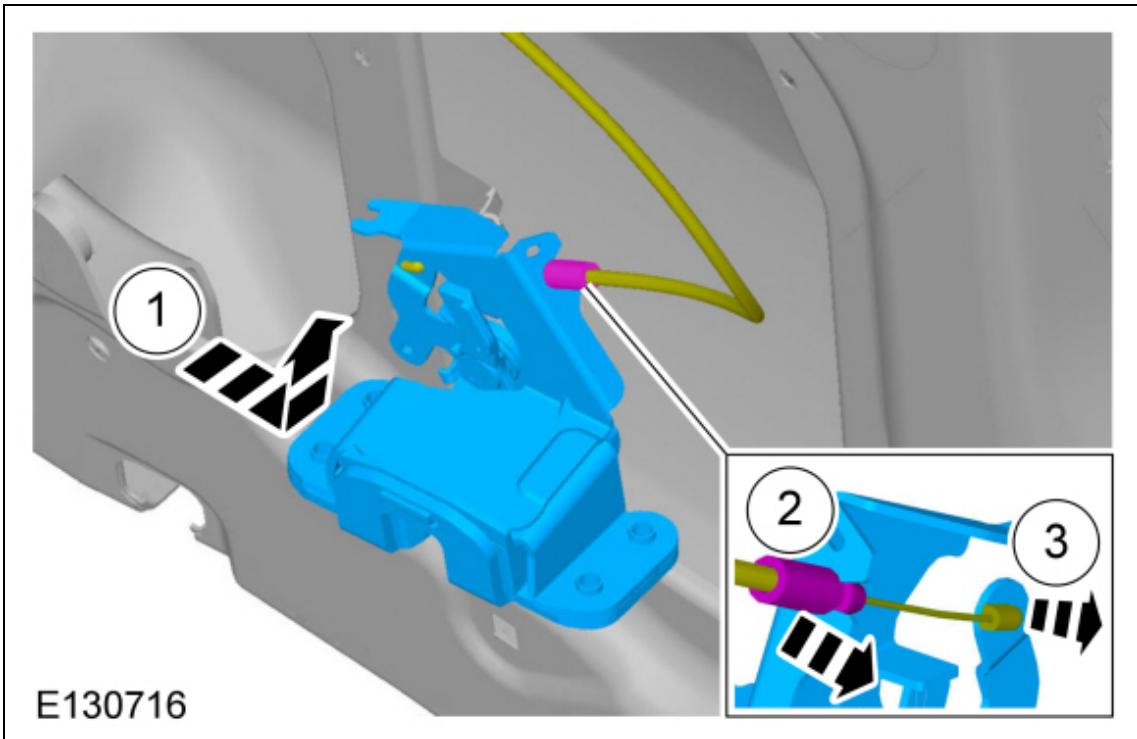

Installation

1. To install, reverse the removal procedure.

Copyright © 2019 Ford Motor Company
