


Rear Door Upper Latch - SuperCab


Removal

NOTE: LH side shown, RH side similar.


NOTE: Removal steps in this procedure may contain installation details.

1. Remove the rear door trim panel.
Refer to: Rear Door Trim Panel - SuperCab (501-05) .
2. Disconnect and release the rear door ajar wiring harness.
 - Release the rear door ajar wiring harness retaining clips.
 - Disconnect the rear door ajar electrical connector.



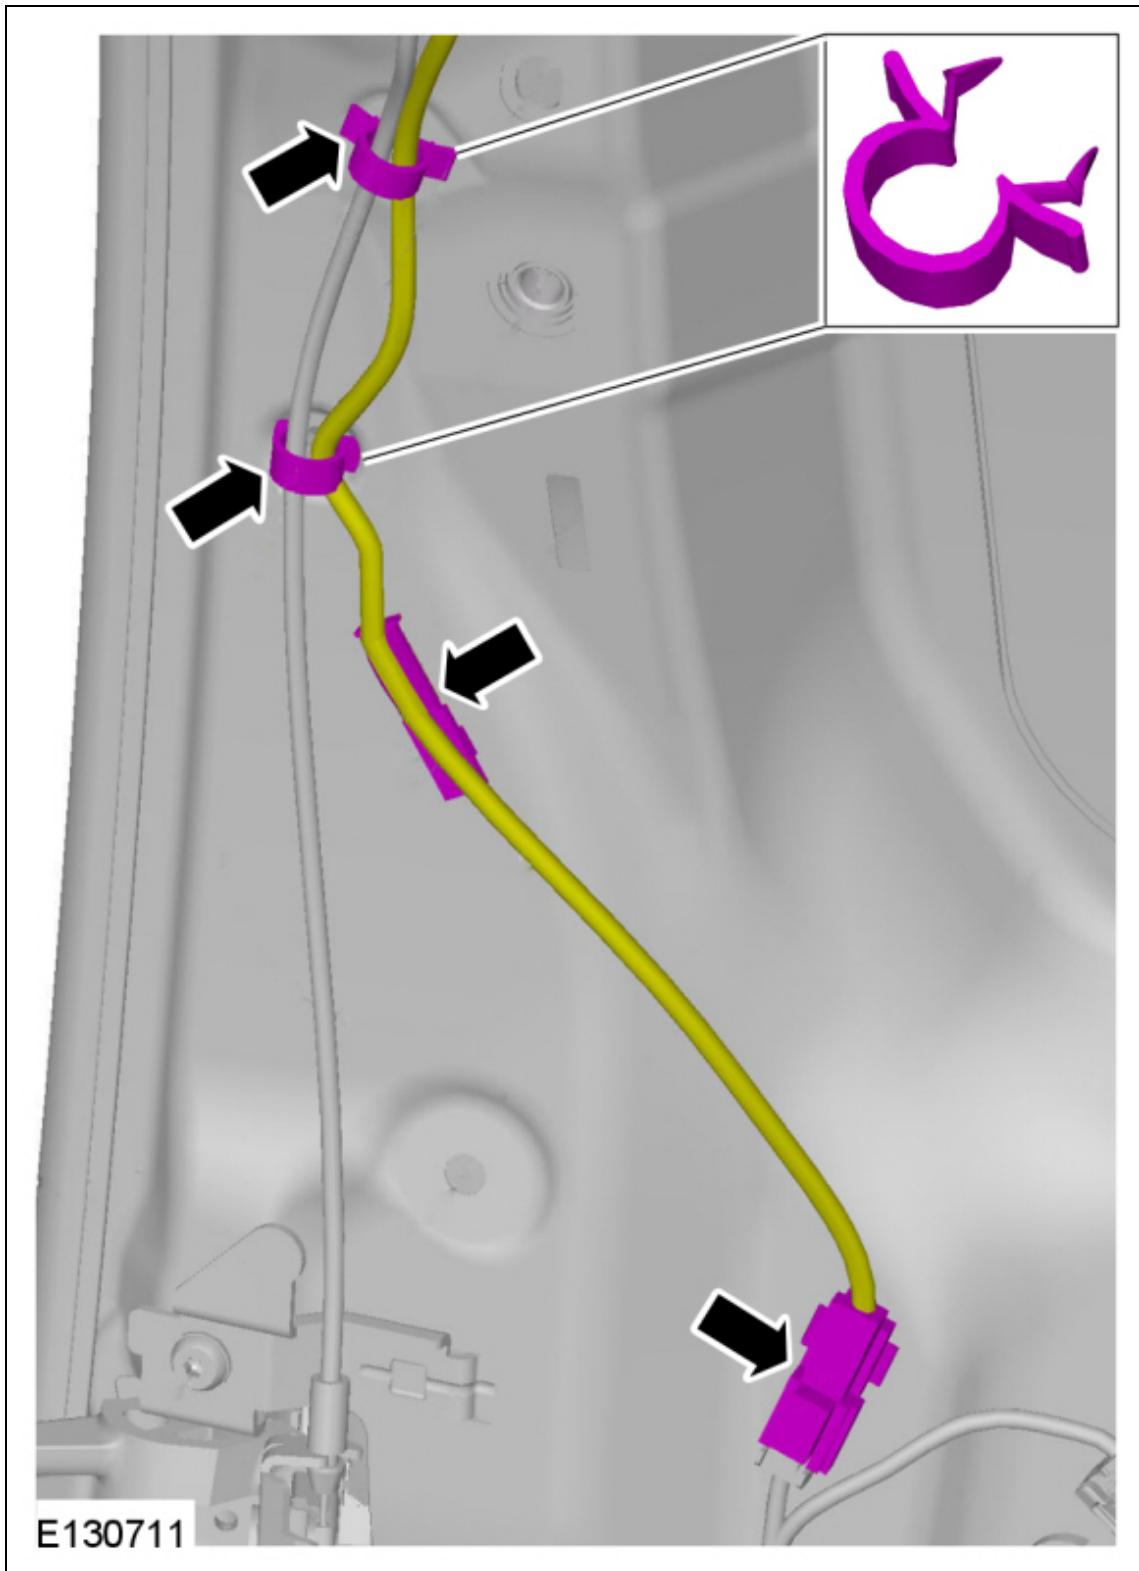

3.
 - Remove the rear door upper latch.
 1. Release the cable from the mounting bracket.
 2. Remove the cable eyelet from the rear door upper latch.
 3. Remove the bolts and rear door upper latch.
Torque: 89 lb.in (10 Nm)

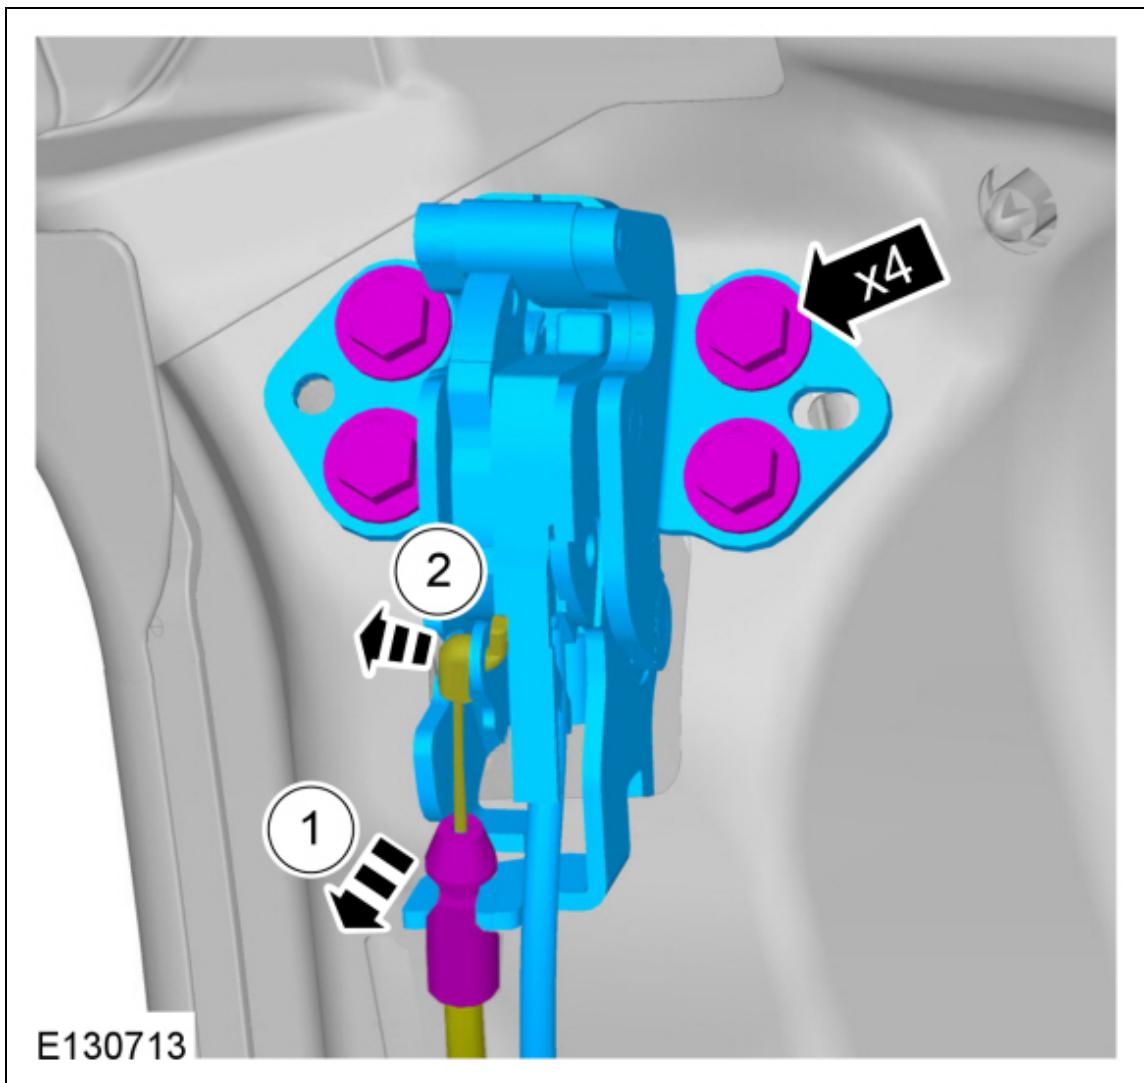

Installation

1. To install, reverse the removal procedure.

