


Washer Hose Repair


Repair

NOTE: This procedure may be carried out on rubber hoses only. If a plastic washer hose is damaged, a new washer hose must be installed.

1. Locate and verify the damaged washer hose.
2. Cut the hose cleanly and remove the damaged portion of the washer hose.
Dimension: 0.5000 in (12.7 mm)

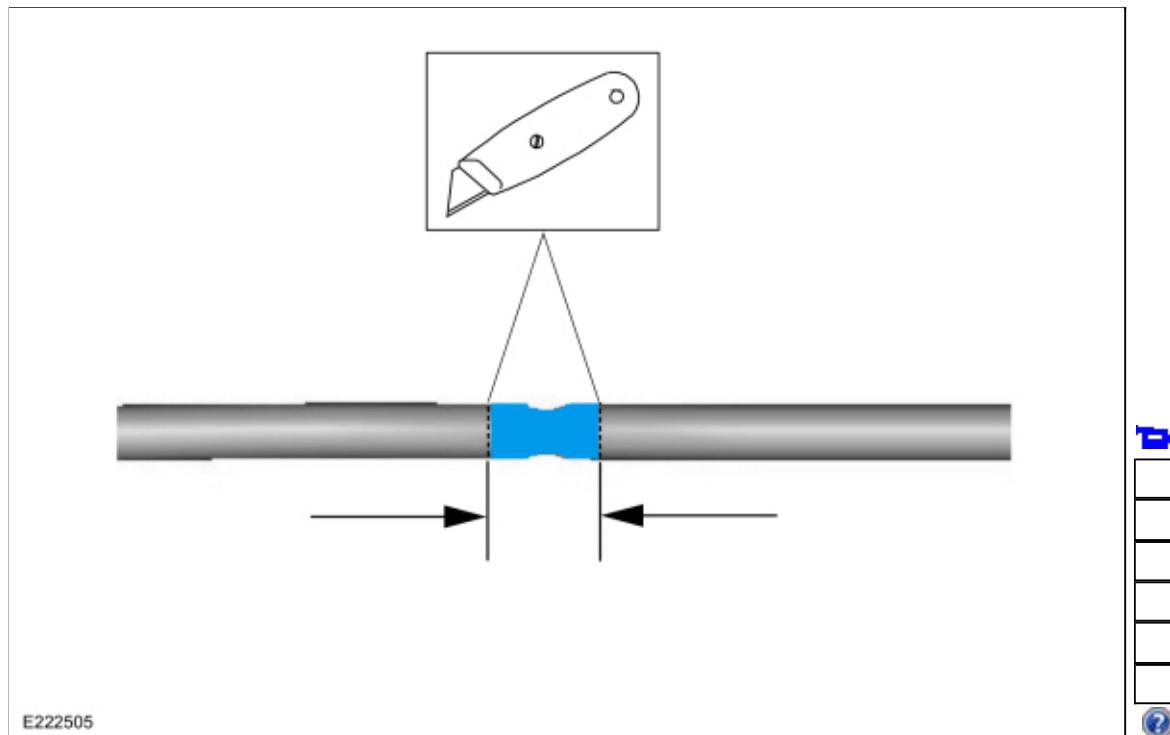

3. Install a windshield washer hose adapter between the cut ends of the hose.

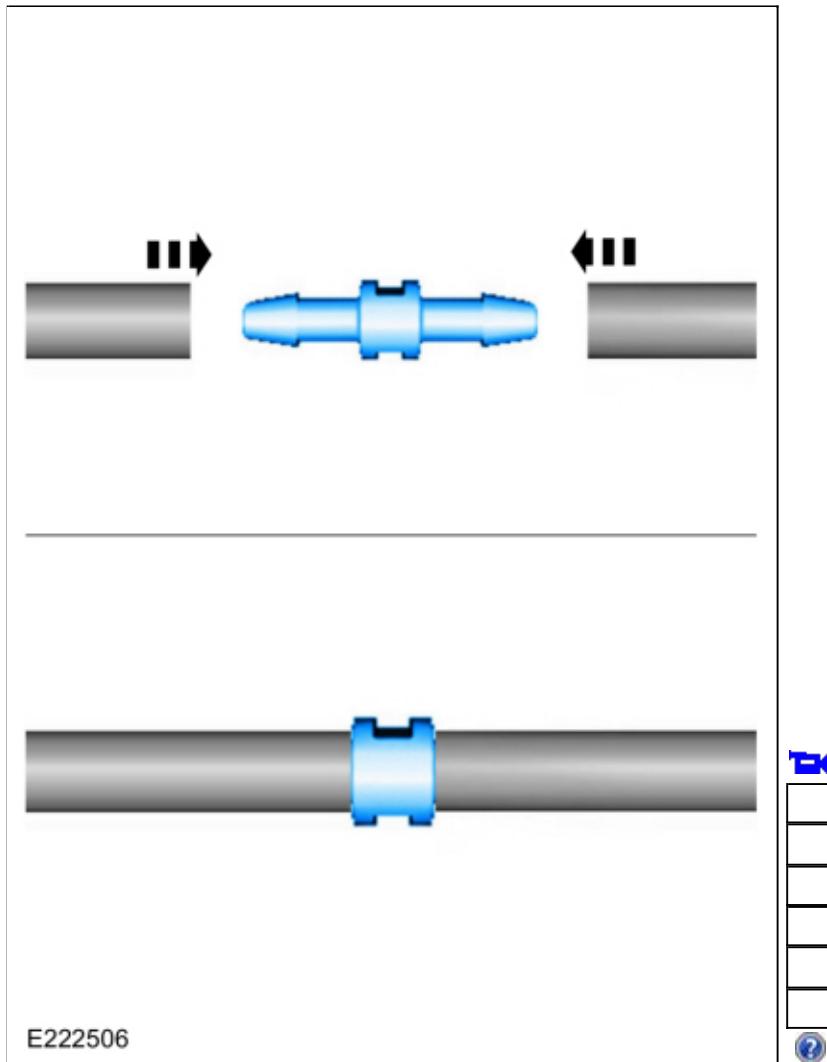

4. **NOTE:** *In difficult cases, clamping may be required.*

If necessary, install a segment of 6.4 mm (0.25 in) ID black rubber hose over the ends of the washer hose and clamp both ends of the rubber hose using spring clamps.

Copyright © 2019 Ford Motor Company

